


SENTECH STC-1000 Progressive Scan

**1/3" CCD
Industrial Machine
Progressive Scan double
speed machine vision
camera**

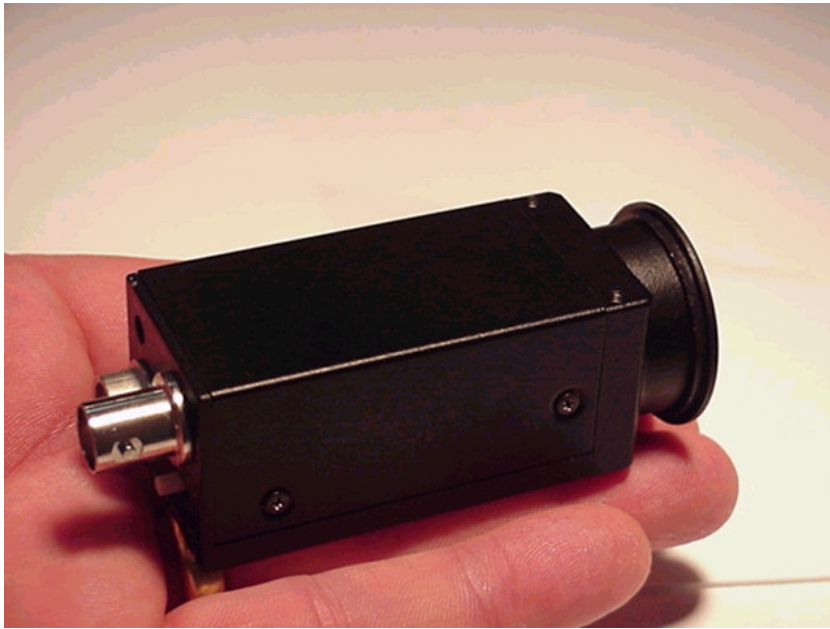

The STC-1000 series industrial monochrome high speed machine vision camera provides excellent performance for machine vision solutions. This compact camera features high quality reproduction, four scanning modes, normal or double speed, a 1/3" high resolution VGA CCD, electronic shutter to 1/10,000 of a second normal speed and 1/20,000 of a second in double speed, HD/VD external sync input / output, random shutter trigger and a 12 pin connector for easy access of power, video signal and sync signals.

Features:

- Four Scanning Modes 2:1 / Progressive
- Normal Speed / Double Speed
- 1/3" IT VGA CCD, 659(V) x 494(H)
- Electronic Shutter
- External Sync, (HD/VD)in/out
- Small size, Lightweight
- 495 TV Lines
- 12 pin Connector
- 56dB S/N Ratio
- 1 Lux normal speed, 2 Lux double speed
- Gamma 0.45 or 1
- 12VDC

STC-1000 Progressive Scan Camera

Technical Specifications

STC-1000

- 659(H) x 494(V) 1/3" VGA IT CCD
- Horizontal Frequency: 12.2727Mhz (Normal Speed), 24.5454Mhz (Double Speed)
- Vertical Frequency: 15.734KHz (Normal Speed), 31.468KHz (Double Speed)
- Sync System: Internal or HD/VD
- Square Pixel: 7.4µm square
- Random Shutter Trigger
- 2:1 Interlace or Progressive
- Horizontal Resolution: 495 Lines
- Minimum Illumination: 1 Lux (Normal Speed), 2 Lux (Double Speed) F1.4
- S/N Ratio: More than 56dB
- C Mount
- Gamma: 0.45 / 1.0
- Pixel Clock Out
- Gain: Fixed, Manual Adjust, AGC
- Electronic Shutter 1/60-1/10,000 sec (Normal Mode) 1/120-1/20,000 (Double Speed)
- Video Output: 1.0p-p 75 ohms
- 12 VDC
- Operating Temperature: -10 degrees C to +40 degrees C (14F-104F)
- Weight: 85g
- Dimensions: 31(W) x 29(H) x 73(D)

SENTECH

Sensor Technologies America Inc.

1015 North I-35E #206 Carrollton, TX 75006

Phone: 972-245-4243 Fax: 972-446-0056

Toll Free 877-736-8324 (877-SENTECH)

Website: www.sentechAmerica.com